


> AXR8

Excellent resistance to solvents and to high temperature
 Excellent resistance to smudge and scratch
 Excellent printing quality


AXR®8 is a high performance resin ribbon designed for the most demanding applications regarding resistance to mechanical aggressions and/ or temperature and/ or solvents. It is fully compatible with the label materials dedicated to the same high performance applications.

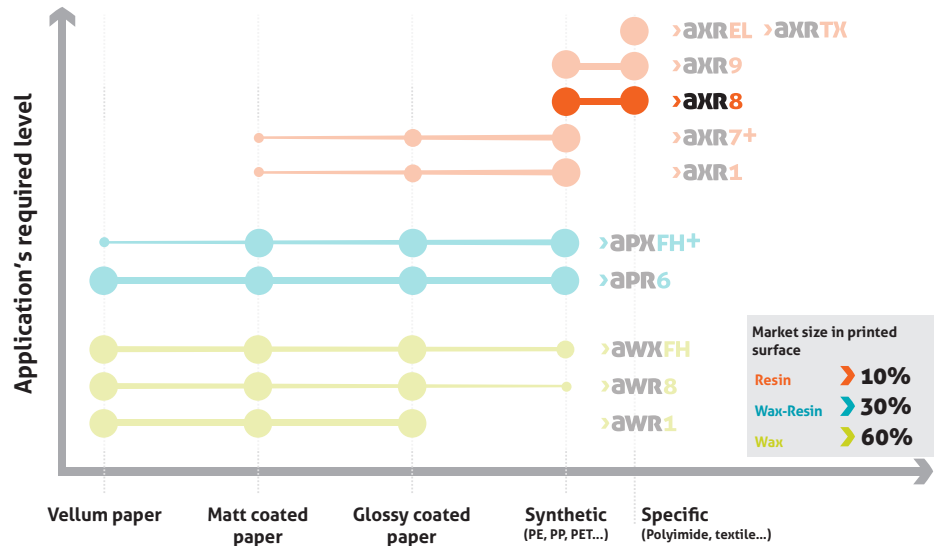


Printing receptor

synthetics	specific
PP ●●●	Polyimide ●●●
PE ●●●	Acrylate ●●●
PET ●●●	

Printer settings

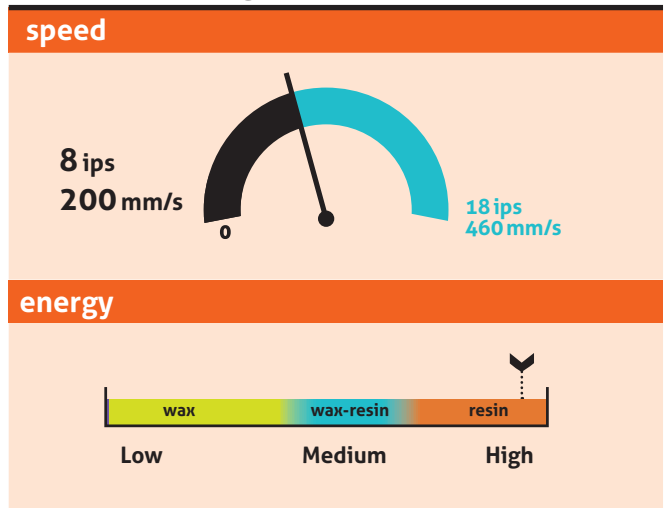

Print resistance

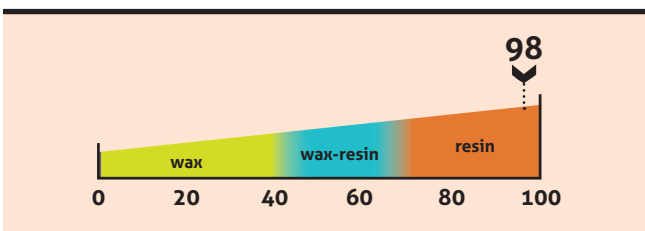


Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65

Your ribbon identity

Colours: ●
 Length (m):
 Width (mm):
 Part number:

Your distributor:
 Contact :



axr8

Application fields




Product performance

print quality					
90°Barcode	95	A _a Small characters	95	Logos	95
0°Barcode	100	2D Barcode	98	Blackness	1,6 ODR*
technical resistances					
Heat	250°C 300°C 572°F	Light/Blue Wool	>7	Solvents	90
Water/Submerge	100	Rubbing	95	Rubtester: 939g, no damage after ... cycles : IPA: 200 Ethanol: 80 Mineral Spirit: 80 Unleaded gasoline 98: 10 Motor oil: 250 Brake fluid: 10	

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Resin
Melting point	85°C/185°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated	

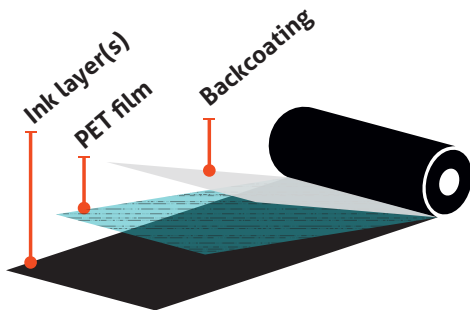

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.