



STANDARD WAX FOR FLAT HEAD PRINTERS


RECEPTOR MULTI-COMPATIBILITY EXCELLENT BLACKNESS COMPETITIVITY

AWR®8 is the very latest generation of ARMOR wax ribbon. It is a competitive ribbon that doesn't make any compromise to quality and printing performance. AWR®8 matches all criteria expected by a traditional wax application.

Blackness Macbeth D19C 0 0.5 1 1,5 2 2,5 Sharpness 0 20 40 60 80 100 O°Barcode 0 20 40 60 80 90°Barcode 0 20 40 60 80 100

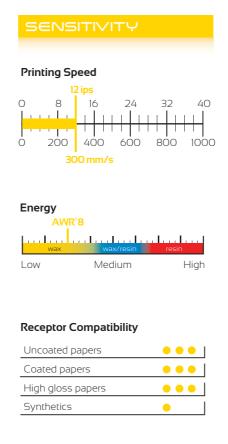

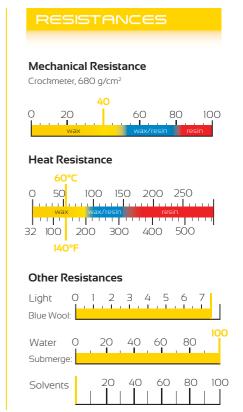



















STANDARD WAX FOR FLAT HEAD PRINTERS

The characteristics of AWR® answer the requirements of the following application fields:

(If your application is not among the ones below, please contact us.)

































Backcoating:

Silicon based. Friction coefficient: Kd < 0.2.

Ink:

Wax. Melting point: 65°C / 149°F (ARMOR procedure).

Storage:

Backcoating

PET film

Ink laver(s)

12 months, 5-35°C (40-95°F), 20-80 % Humidity Rate.

PET film:

Thickness: 4.5 µm.

Ribbon:

Thickness (black): < 9 µm. The ribbon is anti static build-up

All ARMOR product sheets are available on our website: www.armor-tt.com

CERTIFICATIONS

REACH / SVHC Free: 1907/2006/EC

Food Contact Approved: 1935/2004/EC

Heavy metals: - 2002/95/EC

- 2002/96/EC

- 2011/65/EC

California Proposition 65

Halogen Free

COLOUR RANGE

Black

SUSTAINABLE DEVELOPMENT

ARMOR evaluation of AWR®8:

To be compared with our other products.

Environment mulmul



The film is produced in one of the industry's most organised and awarded factories:



Quality, health, safety and environment certifications: 150 9001: 2008

OHSAS 18001: 2007

ISO 14001: 2004 ISO 50001: 2011



Responsible Care: International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



Global Compact: UN initiative inviting companies to apply fundamental ethical and environmental values.

